


ELAFLEX



ZV 25

Product Code:

ZV 25.3M1

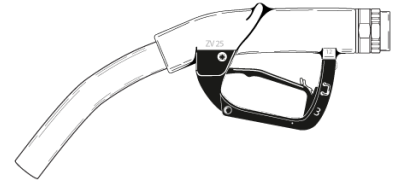

Components:

Body

Name Standard Body ZV25
product code Standard Body ZV25

Guard

Name Guard No. 3M
product code EG 281.3 M
Addition to Product Code 3M
Application Gilbarco D, Scheidt & Bachmann (previously also Salzkotten, Schwelm, Nuovo Pignone, Cetil)
Comment with block magnet
Description for reed switch contact-less on/off switching in the nozzle booth
Material Black Reinforced Polyamide, Magnet

Hose Inlet

Name Swivel 1" BSP female
product code A 075.1
Addition to Product Code 1
Comment Easy-rotating swivel, swivel nut stainless steel. Hose Inlet aluminium.
Material Nozzle inlet size M34x1,5.
aluminium / stainless steel

Spout

Name ER 337 standard spout aluminium, OD 30 mm
product code ER 337

Latching

Name With latch pin
product code EG 281.3 M
Application Use in countries where latching of the lever is allowed. During refuelling the lever must not be held open manually. Attention - avoid spills: ZV 25 is a NON automatic nozzle. Use of latching only advisable if the user continuously controls the refuelling process.
Description hold-open function

Working Pressure

Name	Standard
product code	Standard
Application	Working Pressure 0.5–3.5 bar

Special Type

Name	Standard
Application	suitable for pressure service with a pump

Strainer

Name	Without
Description	Standard

Safety Break

Name	Without Safety Break
-------------	----------------------

Sight Glass

Name	Without
-------------	---------