


# ELAFLEX



## ZVA 25

**Product Code:**

ZVA 25.3M1 LT FS 5bar EK104black

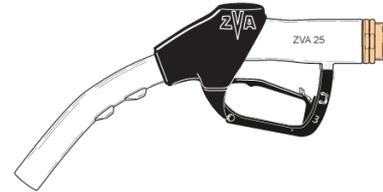

### Components:

#### Body

**Name** ZVA 25 Standard  
**product code** ZVA 25 Standard

#### Guard

**Name** Guard No. 3M  
**product code** EG 281.3 M  
**Addition to Product Code** 3M  
**Application** Gilbarco D, Scheidt & Bachmann (previously also Salzkotten, Schwelm, Nuovo Pignone, Cetil)  
**Comment** with block magnet  
**Description** for reed switch contact-less on/off switching in the nozzle booth  
**Material** Black Reinforced Polyamide, Magnet

#### Swivel

**Name** Swivel 1" BSP female  
**product code** EA 375.1  
**Addition to Product Code** 1  
**Material** Brass, stainless steel, NBR

#### Spout

**Name** ER 381  
**Description** Standard Spout OD 31 mm  
**Material** Aluminium

#### Latching

**Name** With latch pin  
**product code** EG 281.3 M  
**Application** Use in countries where latching of the lever is allowed. During refueling the lever must not be held open manually.  
**Description** hold-open function

#### Special Type Temperature

<b>Name</b>	FS Type
<b>Addition to Product Code</b>	LT FS
<b>Application</b>	Used in cold regions, such as Scandinavia, Russia etc. For low temperature down to -40° C.
<b>Description</b>	Standard nozzle with low temperature LT FS swivel (with fluorosilicone lip seal ED 179 FS).

## Special Type Working Pressure

<b>Name</b>	Special Type 5 bar
<b>product code</b>	with spring EF 362.6
<b>Addition to Product Code</b>	5bar
<b>Application</b>	Working pressure up to 5 bar
<b>Overview New</b>	5 bar

## Scuffguard

<b>Name</b>	Scuffguard Black
<b>product code</b>	EK 104 black
<b>Addition to Product Code</b>	EK104black
<b>Material</b>	Soft PVC

## Safety Break

<b>Name</b>	Without Safety Break
-------------	----------------------

## Sight Glass

<b>Name</b>	Without Sight Glass
<b>product code</b>	Without Sight Glass