


ELAFLEX



ZVA Slimline 2 GR

Product Code: ZVA 2 GRV 3M EK044black EK043black

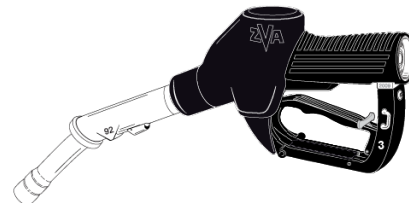

Components:

Type

Name	GRV
product code	ZVA 2 GRV
Application	Automatic petrol station nozzle with vapour recovery. flow rate up to 45 l/min. Suitable for all standard gasoline fuels (also with Ethanol content). Not suitable for pure alcohol, water and solvents.
Working Pressure	0.5-3.5 bar
Weight	~1.0 kg
Temperature Range	-20° C to +55° C
Comment	Venturi controlled automatic shut-off with safety cut out attitude. Body of Aluminium, spout with single piece VR suction inlet, of aluminium and stainless steel. Thread connection M 34 × 1.5 female for hose-sided COAX coupling.
Description	Design GRV - with fully integrated vapour valve 'On/Off' GRV (EA 021). Most used type, suitable for dispensers with multiple filling points. The vapour return rate is regulated within the dispenser.

Guard

Name	Guard No. 3M
product code	EG 281.3 M
Addition to Product Code	3M
Application	Gilbarco D, Scheidt & Bachmann
Comment	with block magnet
Description	for reed switch contact-less on/off switching in the nozzle booth
Material	Black Reinforced Polyamide, Magnet

Spout

Name	ER 130 Standard Spout
product code	ER 130
Description	Standard Spout, OD 21 mm
Material	Aluminium, vapour suction inlet and spout tip stainless steel

DSA

Name	Without DSA (Standard)
product code	With standard vacuum cap EK 148, O-Rings EO 271, Spring EF 250.2, diaphragm assembly EA 151

Special Type

Name Standard
Description Temperature range -20° C up to +55° C

Scuffguard

Name Scuffguard Black
product code EK 044 black
Addition to Product Code EK044black
Material Soft PVC

Product Sleeve/ Splashguard

Name Product Sleeve EK 043 Black
product code EK 043 black
Addition to Product Code EK043black
Material Polyurethane (PU)

Sight Glass

Name Without Sight Glass

Safety Break

Name Without Safety Break