


# ELAFLEX



## ZVA 32

**Product Code:**

ZVA 32.4W4 EK324Black

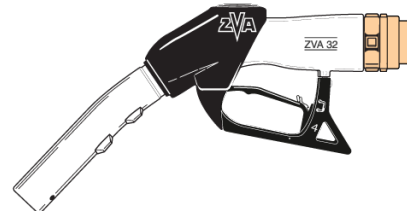

### Components:

#### Body

<b>Name</b>	ZVA 32
<b>product code</b>	ZVA 32
<b>Application</b>	For gasoline, diesel, fuel oil, petroleum, Avgas and Jet-A1.
<b>Working Pressure</b>	1,5-6 bar.
<b>Comment</b>	Not suitable for viscous oils and water or solvents.
<b>Description</b>	HIFLO-Automatic nozzle
<b>Material</b>	Aluminium

#### Guard

<b>Name</b>	Guard No. 4W
<b>product code</b>	EG 281.4 W
<b>Addition to Product Code</b>	4W
<b>Application</b>	For old dispensers from Adast, Ferranti, Tokheim
<b>Material</b>	Black Reinforced Polyamide

#### Swivel STD

<b>Name</b>	Swivel 1 1/4" BSP female
<b>product code</b>	EA 318.4
<b>Addition to Product Code</b>	4
<b>Material</b>	Brass

#### Swivel Strainer

<b>Name</b>	Without
<b>product code</b>	Without
<b>Description</b>	The standard version of this nozzle is supplied without a strainer as for most applications it is not needed.

#### Spout with Swivel STD

<b>Name</b>	ER 312 (Standard)
<b>product code</b>	ER 312
<b>Description</b>	OD 39 mm, length 240 mm
<b>Material</b>	Aluminium

## Latching

<b>Name</b>	With latch pin
<b>product code</b>	EG 281.4 W
<b>Application</b>	Use in countries where latching of the lever is allowed. During refueling the lever must not be held open manually.
<b>Description</b>	hold-open function

## Special Type

<b>Name</b>	Standard
<b>Description</b>	Standard type temperature range -20° C up to +55° C. With special seals, special diaphragm.

## Scuffguard

<b>Name</b>	Scuffguard Black
<b>product code</b>	EK 324 Black
<b>Addition to Product Code</b>	EK324black
<b>Description</b>	Standard
<b>Material</b>	Soft PVC

## Safety Break

<b>Name</b>	Without Safety Break
<b>product code</b>	Without