




ZVA Slimline AdBlue

Product Code:

ZVA 3M AdBlue EK144black EK172

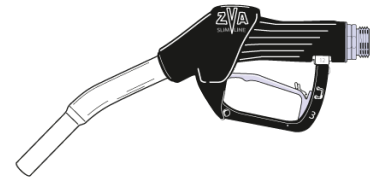

Components:

Nozzle Body

Name	ZVA Slimline AdBlue (Standard)
Addition to Product Code	AdBlue
Working Pressure	0,5 up to 3,5 bar
Weight	1,05 kg (total nozzle with fixed inled or swivel)
Comment	To avoid misfuellings, the nozzle will only open in combination with magnet adapter ELAFIX 40 for the Filler neck. Construction similar to ZVA Slimline with automatic shut-off and safety cut out ball valve, check valve, 3-speed lever latch with removable latch pin EB 280, and screen EK 172.
Description	
Material	Nickel plated aluminium

Guard

Name	Guard No. 3M
product code	EG 281.3 M
Addition to Product Code	3M
Application	Gilbarco D, Scheidt & Bachmann (previously also Salzkotten, Schwelm, Nuovo Pignone, Cetil)
Comment	with block magnet
Description	for reed switch contact-less on/off switching in the nozzle booth
Material	Black Reinforced Polyamide, Magnet

Hose Inlet

Name	Swivel 1" BSP male
product code	EA 075 A
Material	Stainless Steel

Spout

Name	AdBlue standard spout ER 041, OD 19 mm
product code	ER 041

Latching

Name	With latch pin
product code	EG 281.3 M
Application	Use in countries where latching of the lever is allowed. During

Application

refueling the lever must not be held open manually.

Scuffguard

Name
product code
Addition to Product Code
Material

Scuffguard Black (Standard Colour)
EK 144 Black
EK144black
Soft PVC

Strainer

Name
product code
Addition to Product Code
Description

Strainer (Standard)
EK 172
EK172
400 my (40 mesh), white

Safety Break

Name

Without

Product Badge

Name
product code

Without Product Badge
Without